




## CHP & CCHP

Cogeneration and trigeneration systems are widely used in Telecommunication and other industries power plants where self-sufficiency, and thus, independence from any external electrical source to generate power, heating water and air conditioning, proves to be a highly beneficial and cost efficient solution.


Cogeneration and trigeneration systems are capable of simultaneously producing electricity and thermal and/or cooling energy.


We can design, manufacture and assemble tailored made solutions according to customers' requirements in Ausonia factory, offering special configurations in soundproof canopy or container, in order to deliver a Plug & Play solution ready for use anywhere in the world.

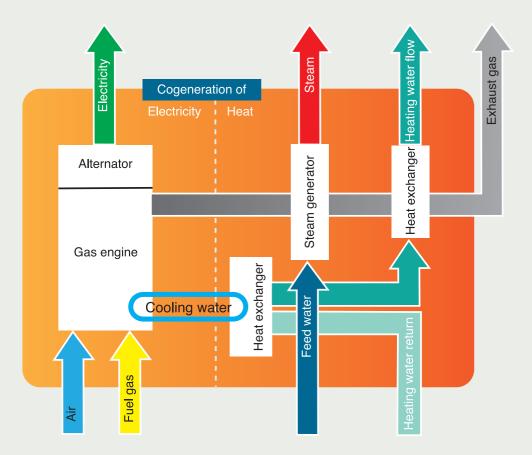


Assuming the thermal load equal to the electric energy supplied to the end user, the Cogeneration system, when compared to a traditional solution, guarantees a drastic reduction of fuel consumption due to the partial recovery of waste heat.

Therefore, the simultaneous production of electricity and heat guarantees both an increase in energy efficiency and a reduction of the environment impact.

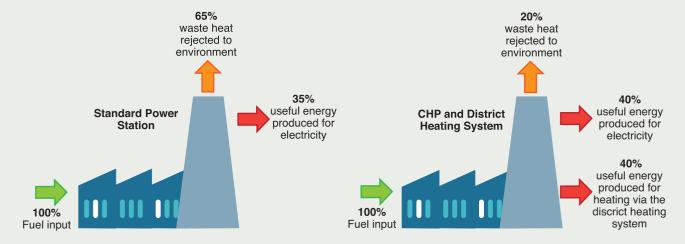

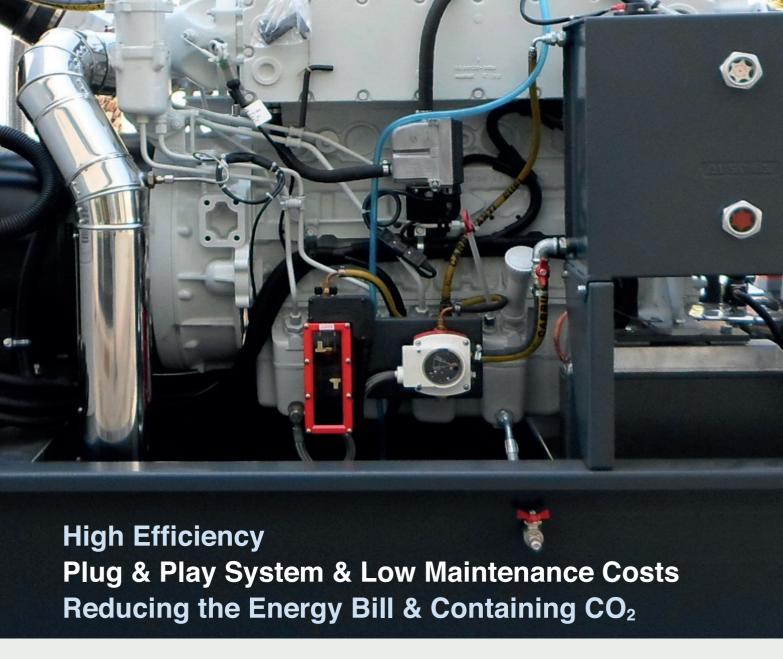

The entire Ausonia portfolio of CHP & CCHP solutions is designed according to the highest market standards and requirements, satisfying any level of requests coming from the most demanding applications, including all the most advanced technologies in the market.

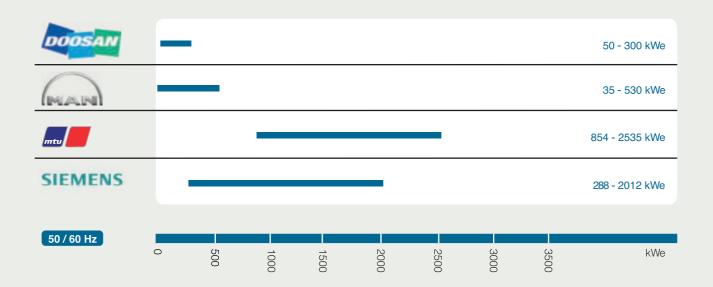


# CASE STUDY

Cogeneration, also known as Combined Heat and Power (CHP), merges the production of usable heat and electricity into a single process that can substantially reduce carbon emissions and energy costs.

A major Telecommunication Operator in Italy required to increase the efficiency and to reduce the costs of the main energy vectors (electric and cooling) for their network station.

After an accurated Energy Analysia and Audit based on the project requirements, Ausonia proposed a CCHP solution powered by a 140 kWe MAN gas engine. The proposed solution has been designed to recover 208 kW of thermal power and 140 kWe of electric power in COP operation mode (24/7). The recovered 208 kW thermal power is used as input to the Absorbtion Chiller, whose output of 145 kW is used to cool the telecommunication equipment installed on site. The Ausonia CCHP solution permitted to reduce by 35% the entire energy costs of the network station and allowed to increase by 40% its global efficiency.

The Payback time of this CCHP solution has been calculated to be 3,5 years only.

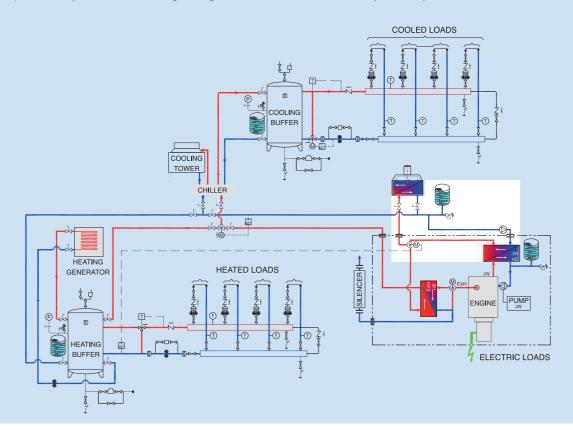

#### MAIN BENEFITS AND ADVANTAGES:

#### **Higher Efficiency**

- Modular Parallel configuration
- Increased Energy Bill efficiency
- Increased fuel efficiency

#### Reliability

- IP54 container for full protection of internal items
- Enhanced continuity and availability of energy supply

#### **Footprint**

- PLUG & PLAY connection of Generators + Switchgear
- Easy installation without special tools for handling

#### Monitoring

- User friendly interface
- Supervision, monitoring and internet access
- Remote command and control integrated in Switchgear room
- Event Log history for the whole system operation

#### **Operation & Maintenance**

- Easier recovery and intervention on site
- Reduced Gas consumption and OPEX
- Reduced CO<sub>2</sub>/NOx emission up to 50%
- Reduced dependancy from not-renewable fossil fuels







Headquarter and factory:

### AUSONIA S.r.I.

Via Favara (SP 62), 452/C 91025 Marsala (TP) - Italy T +39 0923 722311 F +39 0923 721274 ausonia@ausonia.net





The illustrations, diagrams and descriptions herein are the property of Ausonia S.r.I. Duplication, even when only partial, is forbidden without written authorization from the company. The technical data and models presented in this catalogue are not binding. The manufacturer reserves the right to modify them without prior notice.